




TECHNICAL DATA

GENERAL		TW17KX
Load capacity to 500 mm	kg	1700
Load capacity to 600 mm	kg	1555
Unladen weight	kg	2750*
Transmission	-	Hydrostatic
MAST		
Fork carriage	-	FEM 2
Carriage width	mm	1100
ENGINE		
Brand	-	KUBOTA
Model	-	V1505
Power	kW	18,5
Rpm	rpm	2300
Torque	N·m@rpm	92.5@1600
No. cylinders	-	4
Emissions	-	Stage V
Alternator	V - A	12 - 40
DRIVING		
Max. speed	km/h	18
Gradeability	%	35
Traction	-	4x4
Front tyres	-	10,0/75-15.3
Rear tyres	-	7.00-12
HYDRAULIC SYSTEM		
Hydraulic circuit	-	Single gear pump + priority valve
Flow rate	l/min	32
Working pressure	bar	140-160
TANKS CAPACITY		
Fuel	l	35
Hydraulic	l	35
BRAKES		
Service	-	Disc on front wheels
Parking	-	Automatic multi-disc on front wheels

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	Retracted mast height (mm)	Free lift (mm)	Load at maximum height (kg)
Duplex	2500	2080	-	1700
Duplex	3140	2400	-	1700
Duplex	3600	2630	-	1565
Duplex	3000	1820	1070	1700
Triplex	3800	1960	1330	1390
Triplex (Std.)	4000	2180	1330	1390

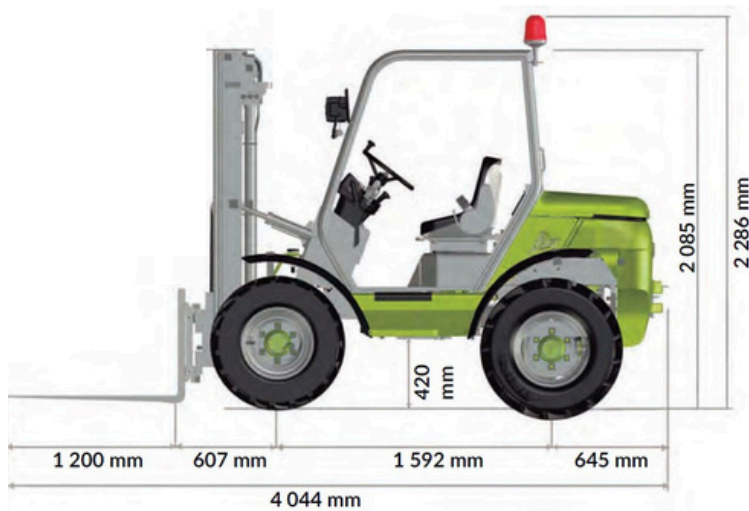

DIMENSIONS

TW17KX

External turning radius	mm	4000
Internal turning radius	mm	2052
Mast tilt forward	°	8
Mast tilt backward	°	8
Fork width	mm	100

OTHER CAB OPTIONS

Octagonal (customized for fruit growers)

Buggy (h<2m)



www.agrimac.es



The data contained in this document is for information purposes only. They do not represent a commitment on the part of the manufacturer and are subject to change.