



TECHNICAL DATA

GENERAL		TE17
Load capacity to 500 mm	kg	1700
Load capacity to 600 mm	kg	1555
Unladen weight*	kg	3070
Transmission	-	Hydrostatic
MAST		
Fork carriage	-	FEM 2
Carriage width	mm	1100
ENGINE		
Brand	-	CFR AM 243.240
Model	kW/CV	23/31
Emissions	-	Zero emissions
DRIVING		
Gears	-	1 forward + 1 reverse
Max. speed	km/h	20
Gradeability	%	20
Traction	-	4x4
Front tyres	-	10,0/75-15,3
Rear tyres	-	7.00-12
HYDRAULIC SYSTEM		
Hydraulic circuit	-	Single gear pump + priority valve
Flow rate	l/min	32
Working pressure	bar	140-160
TANKS CAPACITY		
Hydraulic	l	35
BRAKES		
Service	-	Disc on front wheels
Parking	-	Automatic multi-disc on front wheels
EQUIPMENT		
Battery	V - Ah	102 - 320
Battery Model	-	Li-ION (BSL)
Capacity	kWh	32,7
Charger	V	110
Charging time 20-80%**	min	150
Autonomy (continuous runtime)***	min	180


* 4 m triplex mast

** Variable depending on weather conditions and charging point

***Variable depending on weather conditions and usage

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	Retracted mast height (mm)	Free lift (mm)	Load at maximum height (kg)
Duplex	2500	2080	-	1700
Duplex	3140	2400	-	1700
Duplex	3600	2630	-	1565
Duplex	3000	1820	1070	1700
Triplex	3800	1960	1330	1390
Triplex (Std.)	4000	2180	1330	1390

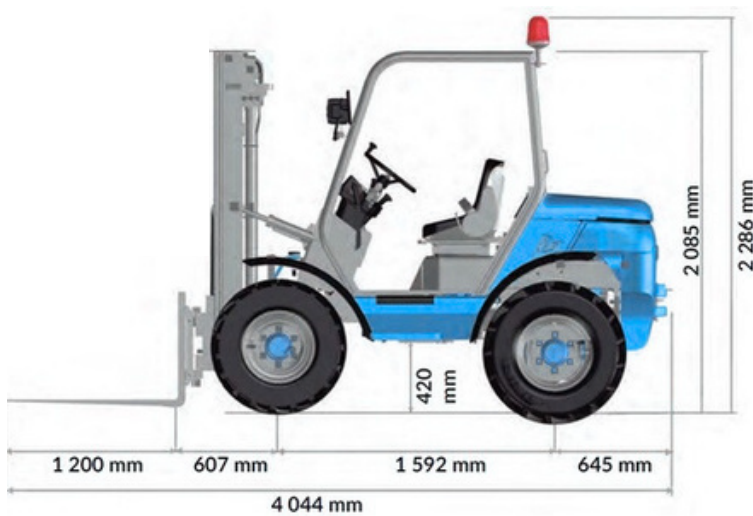

DIMENSIONS		TE17
External turning radius	mm	4000
Internal turning radius	mm	2052
Mast tilt forward	°	8
Mast tilt backward	°	8
Fork width	mm	100

OTHER CAB OPTIONS

Octagonal (customized for fruit growers)

Buggy (h<2m)



www.agrimac.es



The data contained in this document is for information purposes only. They do not represent a commitment on the part of the manufacturer and are subject to change.

Edition June 2026.
Copyright 2026. All rights reserved..