



TECHNICAL DATA

GENERAL

		DW35
Unloading system	-	Rotating
Load capacity	kg	3500
Chassis	-	Articulated & oscillating
Water hopper capacity	l	1070
Level hopper capacity	l	1340
Unladen weight	kg	2490
Transmission	-	Hydrostatic

ENGINE

Brand	-	KUBOTA
Model	-	V1505
Power	kW	18,5
Displacement	cm ³	1498
Rpm	rpm	2300
Torque	N·m@rpm	92,5@1600
No. cylinders	-	4
Emissions	-	Stage V
Alternator	-	12 - 40
Gases treatment	-	No DPF

DRIVING

Max. speed	km/h	18
Gradeability	%	35
Traction		4x4 Twin Lock
Front & rear tyres	-	11.5/80-15.3

HYDRAULIC SYSTEM

Hydraulic circuit	-	Single gear pump 11cm ³
Working pressure	bar	150


TANKS CAPACITY

Fuel	l	35
Hydraulic	l	35

BRAKES

Service	-	Drum brake on front wheels
Parking	-	Automatic multi-disc on rear wheels

DIMENSIONS

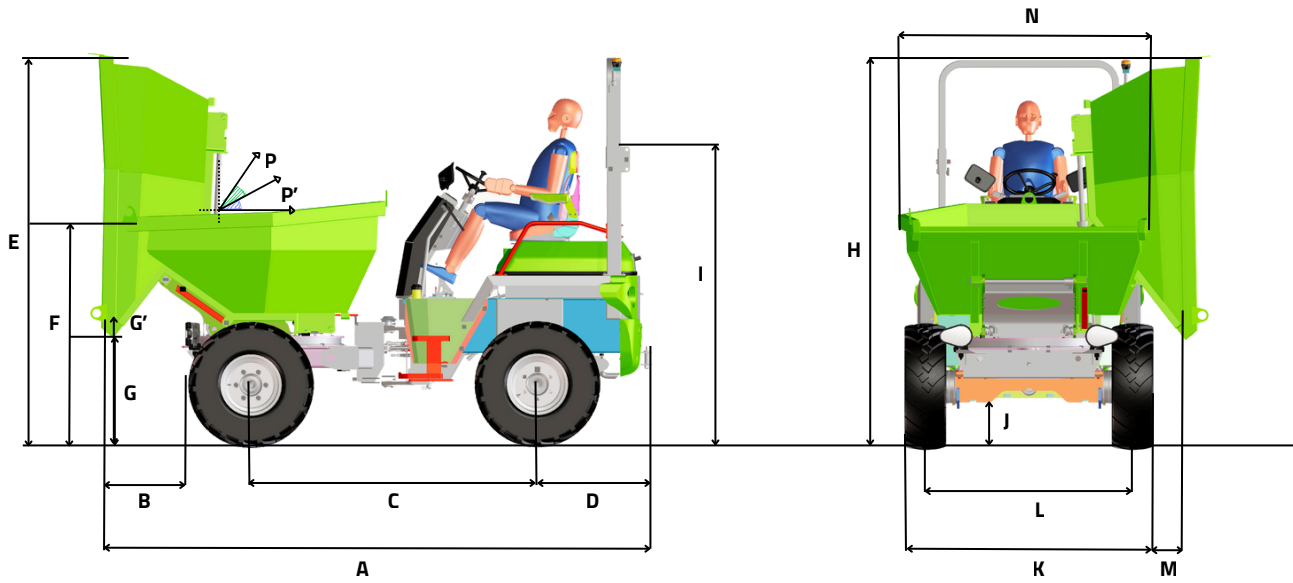

DIMENSIONS (mm)	DW35
Internal turning radius	2265
External turning radius	3990
A	3795
B	550
C	1980
D	805
E	2715
F	1700
G*	790
G**	930
H	2685
I	2075
J	330
K	1725
L	1435
M	250
N	1815

DIMENSIONS (°)	
P	85
P'	65

*Measured at 85° (P)
 **Measured at 65° (P')